


- F-036-4AGB Finish(B) ☐
- F-036-4AGC Finish(C) ☐
- F-036-4AGGS Finish(GS) ☐

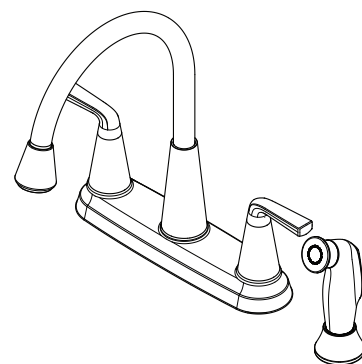

Specifications

Features

- 0.9 Eco Rinse, 1.8 MAX GPM
- 360° Rotating High Arc Spout
- Fixed Hubs
- Installs With or Without Side Spray
- MultiMount 3 or 4-Hole Installation
- Mounting Hardware Included
- TiteSeal™ Technology
- Tri-Flow™ with Eco Option (Stream, Spray, EcoRinse™)
- Pfaster Connect™
- Pforever Seal™ Ceramic Disc Valves
- Spot Defense™ Finish Resists Spots and Fingerprints (GS Finish Only)
- Side Spray Included
- Supply Lines Not Included, 1/2" Fitting
- Limited Lifetime Warranty


Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1 including:
 - ASME A112.18.3 (Backflow Prevention)
- NSF/ANSI/CAN61:Q≤1
- CEC Compliant/CALGreen compliant
- ADA Compliant - ANSI A117.1 (Lever Handles Only)



Dimensions

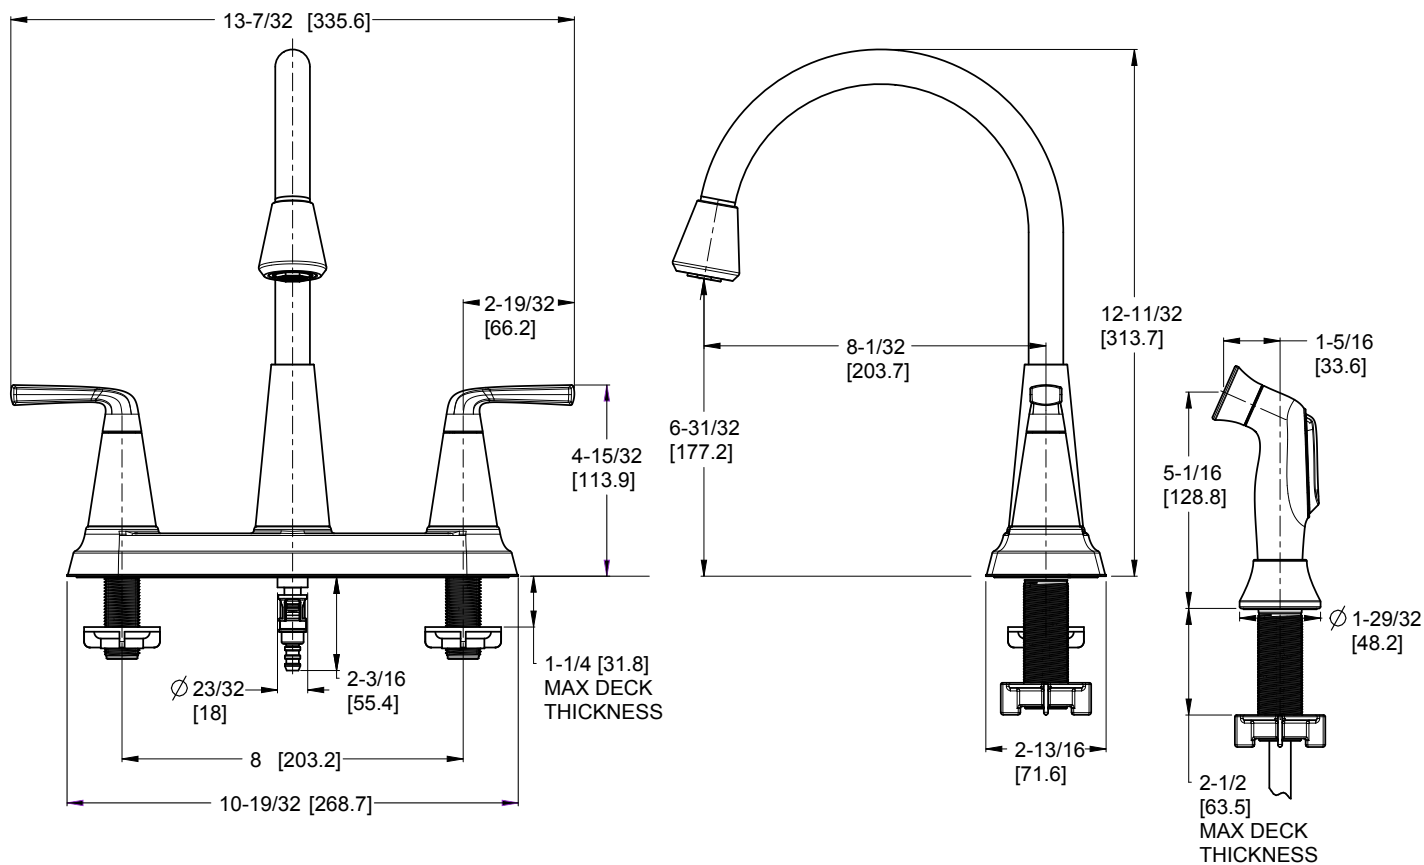

Ø1-3/8 Min to Ø1-1/2 Max. Deck Hole Openings

*supply lines not included
1/2" male OD connection at faucet