


Vaneri™ Tub & Shower Trim

- | | |
|--|---|
| R89-1VRIC Finish(C) ☐ | LG89-7VRIC Finish(C) ☐ |
| R89-1VRIB Finish(B) ☐ | LG89-7VRIB Finish(B) ☐ |
| R89-1VRIBG Finish(BG) ☐ | LG89-7VRIBG Finish(BG) ☐ |
| R89-1VRIBBG Finish(BBG) ☐ | LG89-7VRIBBG Finish(BBG) ☐ |
| R89-1VRIGS Finish(GS) ☐ | LG89-7VRIGS Finish(GS) ☐ |
| | LG89-8VRIC Finish(C) ☐ |
| | LG89-8VRIB Finish(B) ☐ |
| | LG89-8VRIBG Finish(BG) ☐ |
| | LG89-8VRIBBG Finish(BBG) ☐ |
| | LG89-8VRIGS Finish(GS) ☐ |

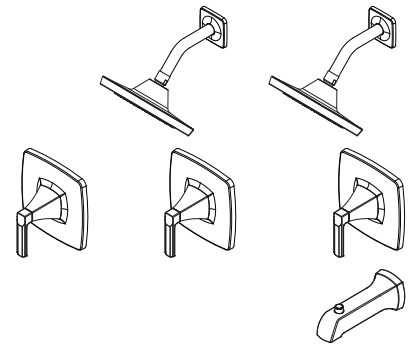

Specifications

Features

- 1.75 GPM Flow Rate (Showerhead)
- Trim Only, Valve Not Included
- Single Function Showerhead
- Brass Ball Joint
- Spot Defense™ Finish Resists Spots and Fingerprints (BBG and GS Finish Only)
- Wipe Clean Nozzles
- SecurePfit™ with Anti-Handle WoBle
- Requires OX8/JX8 Valve (Sold Separately)
- Flange Only (1VRI Only)
- Quick Connect Tub Spout (8VRI Only)
- Push Button Diverting Tub Spout (8VRI Only)
- Pforever Seal™ Ceramic Disc Valve
- Limited Lifetime Warranty

Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1 including:
 - ASME A112.18.3 (Backflow Prevention)
- EPA WaterSense Certified
- CEC Certified/CALGreen compliant
- ADA Compliant - ANSI A117.1 (Lever Handles Only)



Dimensions

